


Characteristics Description

- All-metal fuselage, CNC highly processed
- 4 Kinds of chucks. Easy to operate and change; Suitable for 0.25/ 0.9/ 2.0/ 3.0mm fiber
- Recognizable 2kHz/ 1kHz/ 270Hz signal type with beeping sound
- Identify dominant signal direction
- Universal for SM & MM fiber
- Easy operation & practical
- LED display

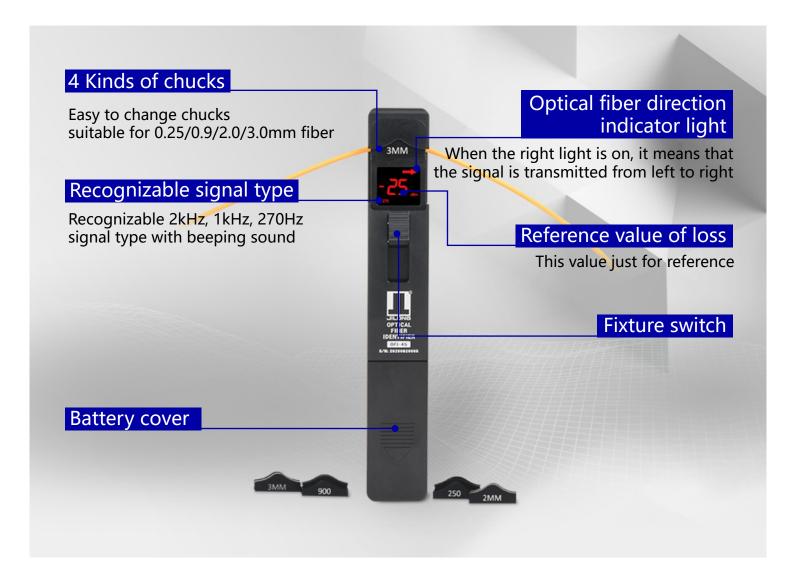

Specifications

Туре	OFI-45
Identified wavelength range	800-1700 nm
Fiber types	3.0mm/ 2.0mm/ 250μm/ 900μm
Signal direction	View by light indicator
Recognizable signal type	270Hz/ 1kHz/ 2kHz
Accuracy	+10dB ~ -30dBm (continuous wave)
	+10dB ~ -25dBm (modulating signal)
Sensitivity	+10 ~ -50 dBm
Battery	9 V x 1
Size	195 x 30 x 27 mm
Weight	200 g

4 Kinds of Chucks; Easy to Change

Suitable for 0.25/ 0.9/ 2.0/ 3.0mm fiber










Product Dispaly







Contact us

Nanjing Jilong Optical Communication Co., Ltd

Address: 12F, Changfeng Technology Building 2, NO.14 Xinghuo Rd, Pukou District Nanjing City 210032, China

Tel: 025-85880035

Mail: sales@jilongtx.com Web: www.JILONGOT.com



Focus on official website for more